


TWILL · DRILL · POPLIN · PANAMA · CANVAS

Greige & Finished Woven Fabrics

Loom-state and processed woven fabrics for apparel, workwear, home and industrial uses — woven on air-jet and projectile (Sulzer) looms, then bleached, dyed, printed or finished for the end use.

- ◆ 100% cotton, CVC and PC compositions
- ◆ Greige for your own processing, or finished fabric
- ◆ Twills, drills, herringbone, poplin, panama, canvas
- ◆ Packing in bales, rolls or on pallets

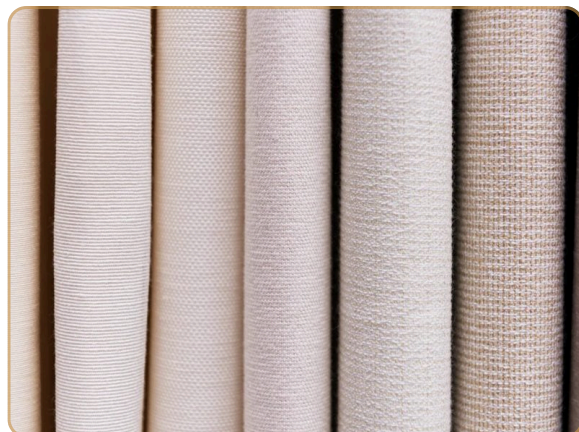

Reference constructions

Reference quality	Composition	Yarn (Ne)	EPI × PPI	GSM*	Weave	Ref.
Standard Poplin	100% Cotton / Blend	40/1 × 40/1	110 × 76	105–128	1/1 Plain	F041
Light 2/1 Twill	Cotton / CVC / PC	20/1 × 20/1	108 × 56	185–220	2/1 Twill	F023
Workwear 2/1 Twill	CVC / PC / Cotton	20/1 × 16/1	108 × 58	205–245	2/1 Twill	F024
Standard 3/1 Drill	Cotton / CVC / PC	20/1 × 16/1	108 × 56	205–250	3/1 Drill	F027
Heavy 3/1 Drill	Cotton / CVC	16/1 × 12/1	128 × 60	265–325	3/1 Drill	F028
Medium Herringbone	Cotton / CVC	20/1 × 20/1	108 × 56	185–235	Broken Twill / Chevron	F031
Half Panama Medium	Cotton / Blend	20/1 × 20/1	72 × 56	165–225	Half Panama / Basket	F043
Medium Canvas	100% Cotton / Blend	16/1 × 12/1	64 × 40	245–325	Plain / Basket	F045

Send us for an accurate quotation

- Construction (yarn × EPI × PPI) or reference quality (e.g. RN F024)
- Composition and greige or finished requirement
- Finished width, GSM and shade / print
- Performance needs (e.g. FR, water-repellent, anti-static)
- Quantity, packing method, delivery date and Incoterm

Programme options

- Bleached, dyed, printed and application-specific finishes
- Width, weight, shrinkage and shade coordination
- Technical finishes for workwear and protective use
- Roll / bale dimensions and labelling to your plan

Greige or finished — one coordinated route. We align weaving and processing so width, shrinkage and shade arrive as specified, not as an afterthought.

01

Define

Specification, quantity & timeline

02

Match

Mills shortlisted for your quality

03

Approve

Samples, lab dips & approvals

04

Execute

Production & testing followed

05

Deliver

Final checks, packing & documents

* GSM ranges are indicative greige/finished references from the R.N. Textiles 70-quality library. Final construction, width, weight and finish are confirmed with the selected mill and approved by physical sample. Certifications (e.g. OEKO-TEX®, GOTS, BSCI, Sedex/SMETA) are held by supplier mills and confirmed per facility, product scope and validity. This sheet is a reference, not a quotation or stock offer.